


Trommellaufäder mit vorwärts gekrümmten Schaufeln / Impeller with blades forward curved

Lieferbar links- oder rechtsdrehend
Standard oder Edelstahl

/ Possible left- or right-turning
/ Standard or stainless steel

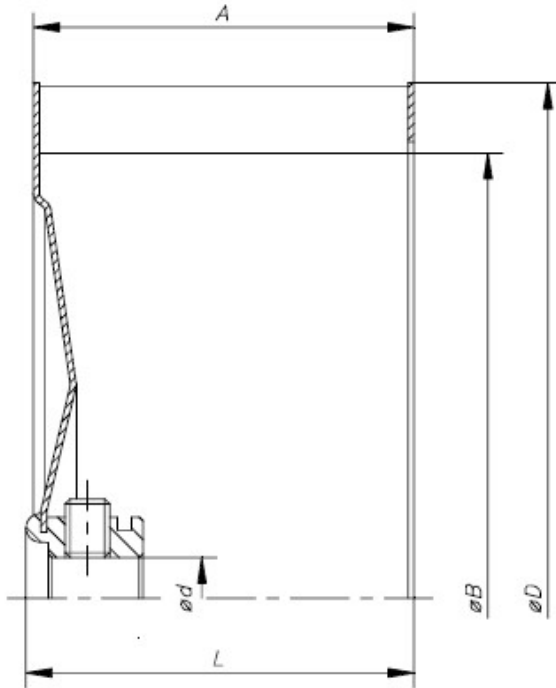

	A	øB	øD	L	ød	
-38	31	64	82	32	06/09/2011	20
-512	51,5	95,5	120	52	9/11	32
-512	51,5	95,5	120	63	19	32
-514	51,5	121	140	52,5	9/11/14	38
-520	53	160	200	63	11	38
-616	62	129	160	63	9/11/14	36
-620	62	161	200	66	9/11/14	38
-718	74	149	180	78	14/19	40
-820	82	94	200	94	19	38
-820	82	162	200	98,5	24	38
-922	91	187	225	103,5	19	42
-922	91	187	225	107,5	24	42
1025	100,5	203	250	117	24	38
1025	100,5	203	250	120	28	38
1028	114	233	280	121,5	28	42
1128	114	233	280	121,5	24	42
1128	114	233	280	137,5	38	42
1231	128	270	315	147,5	28	38
1435	143	295,5	355	166,3	28/38	42
1640	163	327	400	189,5	28/38	38
1845	180	378	454	206,5	28	42
1845	180	378	454	206,5	38	42
2050	204	403	500	230	38/42/48	38
2563	254	511	630	280	42/48	38
2563	254	511	630	279	55	38



Radial fan systems for all branches of industry
System requirement after customer specifications

